Easy to transport–
safe on the road.



Working width: 3 metres
Height folded: 3 metres



For driving on public roads are auxiliary transport wheels necessary.

Super Maxx®

90-5 BIO/90-7 BIO

Fast and manoeuvrable even on small aereas

- Shallow stubble working
- Mechanical weed control
- Working in slurry

1001260720231_1_EN_id Errors and omissions excluded, subject to technical changes

Consultation by:

Enormous area performance – up to 10 ha/h ! Less fuel consumption (approx. 5 l/ha)

Leading in soil structure

GÜTTLER GmbH
Karl-Arnold-Straße 10 • D-73230 Kirchheim/Teck
☎ +49 70 21 98 57 0 • +49 159 01211824
info@guettler.de • www.guettler.de


GÜTTLER®
Leading in Soil Structure

The soil-protecting concept **without roller!**
World debut – Innovative technology.




Super Maxx® 90-5 BIO

- 5-rows
- Space between tines 13 cm
- Working width 9 m
- approx. 3,000 kg

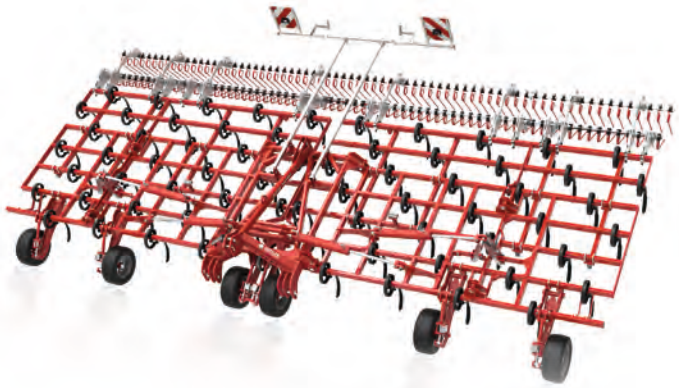

Super Maxx® 90-7 BIO

- 7-rows
- Large working capacity
- Space between tines 13 cm
- Working width 9 m
- approx. 3700 kg

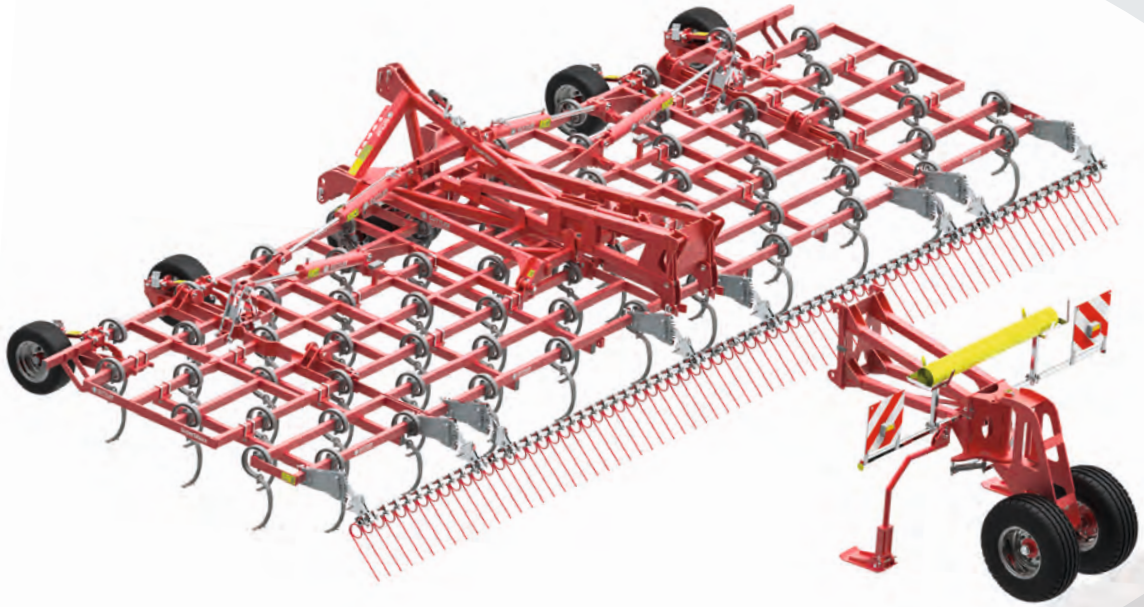

Standard
- Depth control via front gauge wheels
- One row following harrow
- Road lighting kit (LED)

Options
- Second row following harrow
- Transport tarpaulin for tines
- Auxiliary transport wheels

During work the transport wheels are removed.

Quick-connecting system with hydraulic operation.

Leading in soil structure

GÜTTLER®