Use of 200 mm swept points with older Super Maxx® models.

From **2007 to 2021,** all Super Maxx® with tines have been equipped with **one saddle bolt**.

All Super Maxx® from **serial-nummber: HR 45350 are equippted with tines with two saddle bolt holes.**

If the 200 mm swept point should be used with older Super Maxx® with only one saddle bolt, we offer the following options:

Item num. 7580 6104 consisting of:
Saddle bolt (planetary bolt) M10 x 60 10.9
with washer and locking nut M10 10.9





Alternatively, we also can offer you complete 2-hole tine sets at a goodwill price.
Please enquire at: **service@guettler.de**

Attention!
Never tighten saddle bolts with an impact wrench! If the recommended torque of 60 Nm is exceeded, the bolts are stretched and get fatigue fractures very quickly!

Please contact your local GÜTTLER® dealer or one of our GÜTTLER® sales representatives for more information ☎ +49 70 21 98 57 0

Explanation of the series-numbers.
Change to tines with 2 holes from series-number: HR 45350

HR	= Year of construction 2021
45350	= Sequential number within one years
HM	= Year of construction 2017
HN	= Year of construction 2018
HO	= Year of construction 2019
HP	= Year of construction 2020
HR	= Year of construction 2021

From year of construction 2022,
all tines are equipped with two bolt holes for points.



100126O5_2026_02_EN_jd – Except errors, subject to technical changes

Consultation by:

Leader in soil structure

GÜTTLER GmbH
Karl-Arnold-Straße 10 • D-73230 Kirchheim/Teck
☎ +49 70 21 98 57 0
info@guettler.de • www.guettler.de

Point-Primer
for Super Maxx®

Use and overview of GÜTTLER® Super Maxx® BIO points.







TOP

The roller with the golden hoofprint®
The Original. Since 1978

GÜTTLER®
Leading in Soil Structure

Agriculture recommendation from GÜTTLER®


First and second stubble process with narrow points – processing diagonally crossed.

1. Working process: break capillary, the soil-straw-mulch-cover causes a mini greenhouse effect for the germination of weeds. Preserves valuable moisture.
2. Working process: work completely through and superficially straw mixing, combat growth.
3. Working process: swept point for a flat and complete cut.

Oberview GÜTTLER® points
for Super Maxx®.





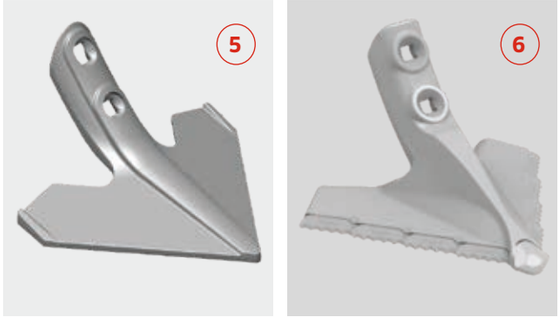

GÜTTLER® Narrow point

For the initial stubble processing, for aerating and loosening. For extremely flat and deeper work up to 15 cm.

- For the first and second stubbple processing (create a layer of fine soil and mulch, and encourage weed seeds to germinate).
- For working on moist loam and clay soils (avoid smearing and crouting the soil).

(1) **Narrow point 60 mm**
item num. 7200 0367
corresponding fastening 1x item num. 7580 6001
- The standard point for the above-mentioned processings.

(2) **Tungsten tip - narrow point 36 mm**
item num. 7200 0368
corresponding fastening 1x item num. 7580 6105
- **Durability of up to 8.0 times**

(3) **Tungsten tip - narrow point 55 mm**
item num. 7200 0355
corresponding fastening 2x item num. 7580 6105
- **Durability of up to 8.0 times.**
- Improved soil mixing due to a wider point tip and steeper geometry.
  Only for machines with 2-hole tines

Inform you now!
Preservation of the soil struktur with the new precision point.

Distributer information:
You will find complete point sets in the **GÜTTLER®** price liste.

GÜTTLER® swept point 200 mm

For effectiv mechanical weed control - all-over cut of weeds and volnteer rape and grain.

- As soon as something green grows: For weed control over the entire area after the first subble processing.
- With the swept point you have an enormous overcut of 70 mm – uniform cut.
- Optimal for the 2nd and 3rd stubble processing as well as a flat mechanical weed control.

(4) **Swept point 200 mm**
item num. 7212 0821
corresponding fastening 2x item num. 7580 6001
- The standard point for the above-mentioned processings.

(5) **Forged point 200 mm**
item num. 7212 0834
corresponding fastening 2x item num. 7580 6105
- **Durability of up to 2.5 times**
- For dry and normal conditions.
- Longer durability for highly wearing soils.
- From medium to high area performances
- Only for machines with 2-hole tines

(6) **Precision point 200 mm**
item num. 7212 0832
corresponding fastening 2x item num. 7580 6105
- **Tungsten – durability of up to 8.0 times**
- For highest durability on all soil types
- Non-compacting and sharp cut even in moist conditions.
- For highest demands on work quality and soil structure, even with extemely high weed content.
- For very high area performance with low wear
- For very stony conditions, we recommend the forged point or the standard swept point 200 mm
- Only for machines with 2-hole tines

GÜTTLER

GÜTTLER